

AE-DC4928-N6PRO Dash cam

Key Features

- 2K front and 1080P rear dual high definition digital lens.
- 2K video from the front camera and 1080P video from the rear camera.
- Full touch screen, IPS screen viewing angle can reach to 178° .
- Support built-in MIC and speaker for audio in and out.
- GPS module is optional to support speed display and route tracking playback.
- Supports TF card with the storage up to 128 GB. Seamless storage without missing seconds.
- Built-in G-sensor. When the vehicle collides or vibrates severely, the emergency recording will be triggered, and the emergency recording backup will be locked.
- The viewing angle can be adjusted up and down by 15° .
- Supports voice recognition. “Open the screen”, “Close the screen”, “Show the way forward”, “Show the way backward”, “Display all”, “Take the photo”, “Start to record”, “Finish recording”and “Lock the video”can be recognized.
- Convenient installation, simple operation, recording after plugging, and automatic recording after power on.
- Reversing parking assist.
- Parking Monitoring . (Optional Fuse Box)




Available Model
AE-DC4928-N6PRO



Specifications

Model	AE-DC4928-N6PRO	
<i>Camera</i>		
Front and Rear Lens Resolution	Front: 2K (2560*1440) Rear: 1080P (1920*1080)	video: 1440p (2560*1440) video: 1080P (1920*1080)
Max. Angle of Front Lens	123° (D), 105° (H), 56° (V)	
Max. Angle of Rear Lens	124° (D), 102° (H), 53° (V)	
Image Sensor	GC4653 (Front) / GC2053 (Rear)	
OSD	Display operation menu	
GPS	GPS (Optional): External GPS module can be connected	
Communication module	Wi-Fi	
Sensor	G-Sensor	
<i>Display Screen</i>		
LCD Resolution	720P, (1280*320)	
Size	9.35 inch	
Display	IPS Screen	
Brightness	600 cd/m ²	
Rear Camera video signal	TVI	
<i>Interfaces</i>		
Power supply interface	Type-C	
<i>General</i>		
Working Temperature	0 °C to 45 °C (32 °F to 113 °F)	
Working Humidity	20% to 70%	
Power supply	4.7 V ~ 5.3 V DC	
Power supply	5 VDC, 2 A	
Power consumption	Max. 5 W	
Rated current	< 1.3 A	
Max. current	< 2.0 A	
Dimension (L x W x H) (without bracket)	250mm x 70mm x 20mm (9.84" x 2.75" x 0.78")	
Weight (Approx)	342g (0.75 lb)	

Dimensions

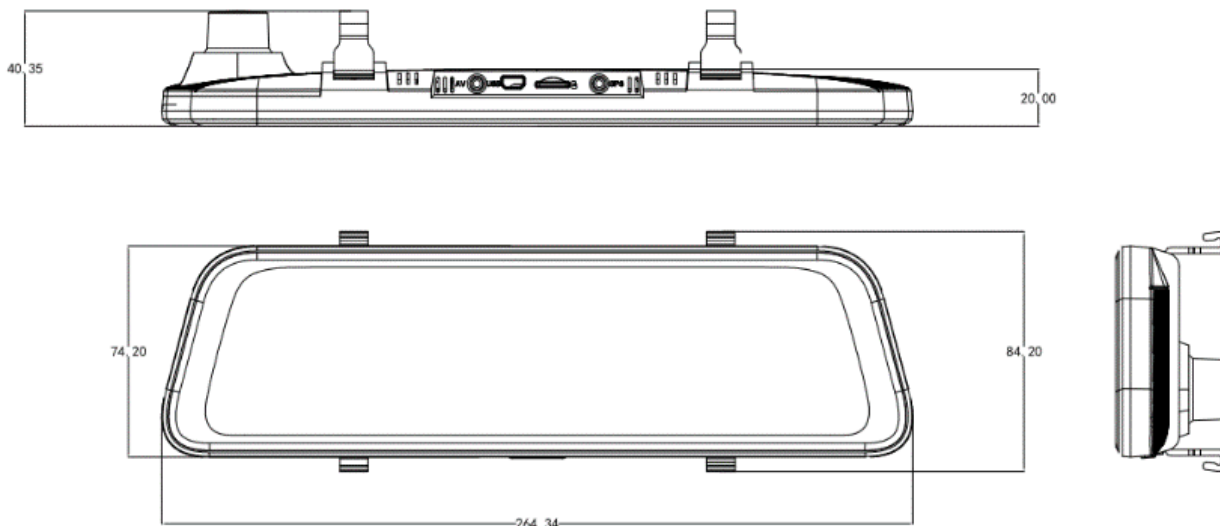

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com